FLUSH DRYWALL ACCESS DOOR

Model KDW

For Wall and Ceilings

KARP ASSOCIATES, INC.
54-54 43rd Street, Maspeth, NY 11378
(718) 784-2105 - Phone
(718) 784-9169 - Fax

DATE

PROJECT DATA
Project Name:
Architect:
Contractor:
Agent/Customer Name:
Tagging Instructions:
Special Instructions:

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

SPECIFICATIONS

GENERAL SCOPE:
Access doors shall be Karp Type KDW as manufactured by Karp Associates, Inc., Maspeth, N.Y.
Sizes shall be as indicated on the drawings.

CONSTRUCTION:
1. Frame shall be 16 gage steel and door shall 14 gage steel.
2. Trim shall be galvanized steel drywall bead.
3. Hinge shall be concealed, continuous piano hinge.
4. Latches shall be flush and screwdriver operated, or shall be key operated cylinder lock with automatic dust shutter.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
6 x 6	6 3/8 x 6 3/8	1	1.8
8 x 8	8 3/8 x 8 3/8	1	2.4
10 x 10	10 3/8 x 10 3/8	1	3.3
12 x 12	12 3/8 x 12 3/8	1	5.8
14 x 14	14 3/8 x 14 3/8	2	6.5
16 x 16	16 3/8 x 16 3/8	2	8.8
18 x 18	18 3/8 x 18 3/8	2	11.1
22 x 22	22 3/8 x 22 3/8	4	15.3
24 x 24	24 3/8 x 24 3/8	5	17.2
36 x 24	36 3/8 x 24 3/8	5	25.9

***** **The wall opening size for doors larger that 48 x 36 shall be 1/2" larger than the door size.**

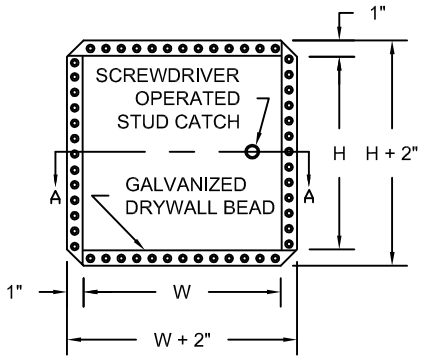

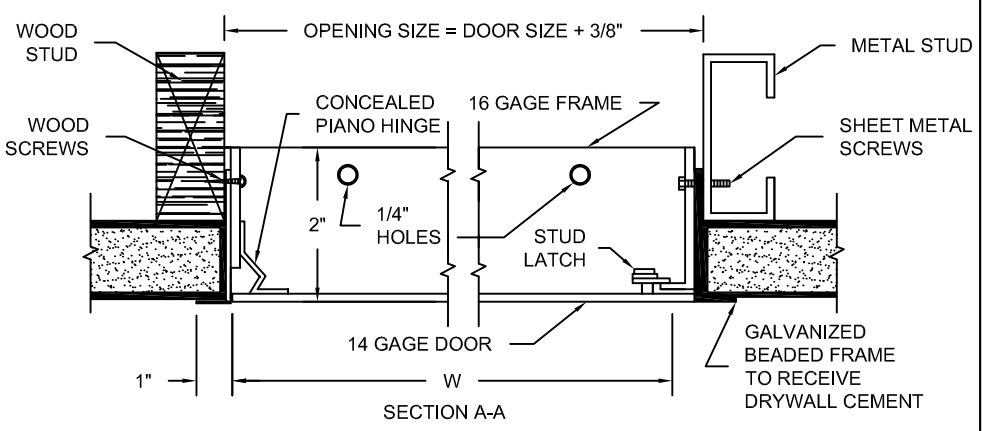

Made with Union Labor