Anti-Ligature Access Door
Model KAL
Prime Coated Steel or Stainless Steel

DATE



KARP ASSOCIATES, INC.
260 Spagnoli Road Melville, NY 11747
(631) 768-8300 - Phone
(631) 768-8350 - Fax

PROJECT DATA
Project Name:
Architect:
Contractor:
Agent/Customer Name:
Tagging Instructions:
Special Instructions:

PROJECT SCHEDULE

Qty.	H	W	No. of Latches	Finish	Remarks


SPECIFICATIONS


GENERAL SCOPE:
Access doors shall be Karp Type KAL as manufactured by Karp Associates, Inc., Melville, N.Y.
Sizes shall be as indicated on the drawings.

CONSTRUCTION:
1. Frame shall be 16 gauge steel and doors shall be 16 gauge steel.
2. Door shall be 5/8" in thickness.
3. Flange of frame shall be one-piece construction, 1" wide.
4. Hinge shall be concealed pivoting rod type.
5. Locks shall be flush and spanner screwdriver operated with cam and studs.
6. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel shall have No. 4 satin polish finish.
7. All 4 sides shall have 1/16" x 3/8" Closed-Cell Sponge Gasket.

STANDARD SIZES

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
12 x 12	12.375 x 12.375	1	8.3
18 x 18	18.375 x 18.375	2	14.2
24 x 24	24.375 x 24.375	2	22.1

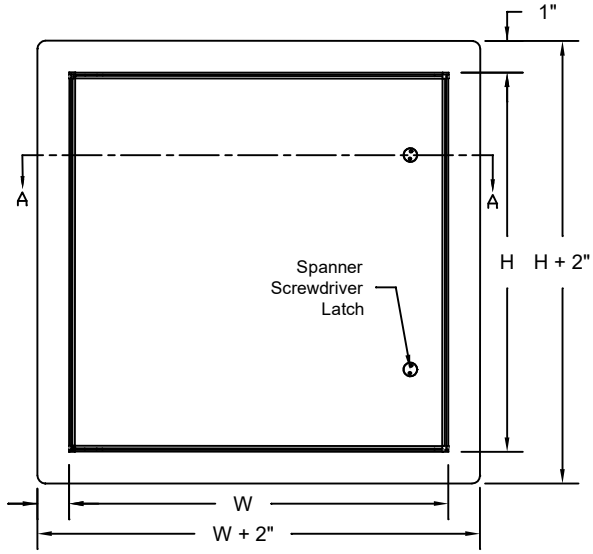

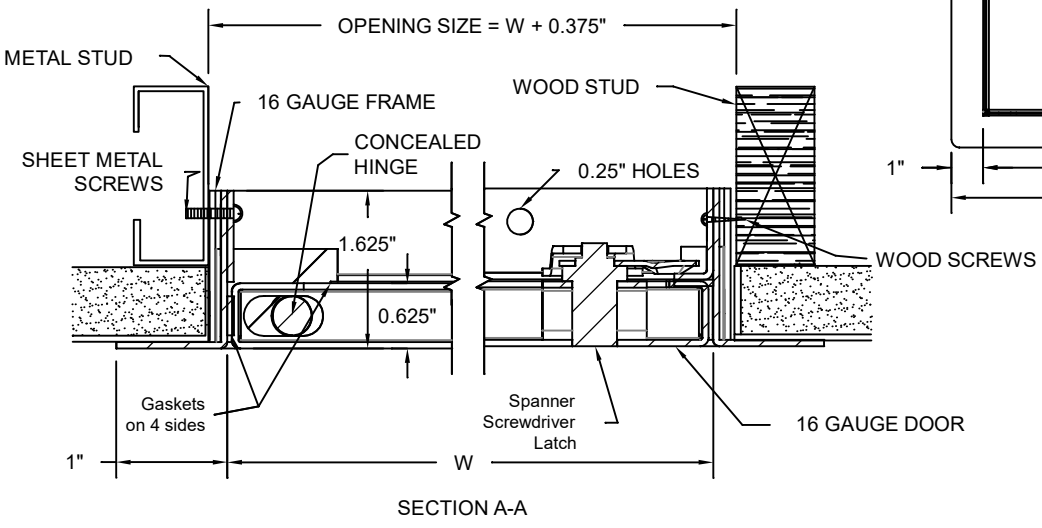

SECTION A-A

Made with Union Labor